[™] P 20 BIG ScaleArmor

OD 4,5" replacement cartridge for ScaleArmor™ ROCK certified system



Plastic container filled with certified ScaleArmor™ media: an anti-scale and anti-corrosion treatment with proven effectiveness that removes with time old calcareous incrustations and offers a corrosion protection for boilers, pipes, pumps and appliances. ScaleArmor™ ROCK is the IAPMO Z601 certified system that prevents limescale build-up with 86% effectiveness compared to untreated water.



MAX WORKING TEMPERATURE 45°C (113°F) MIN WORKING TEMPERATURE 4°C (39,2°F)



MAX TOTAL HARDNESS **50°f (500 ppm CaCO₃)**

Remark - the treated water can be heated up to 75°C - 80°C, above that temperature the ScaleArmor™ media loses gradually its effectiveness.

Anti-scale and anti-corrosion conditioning. Max life-span: 24 months.

Maintenance: none.

Remark - Use a pre-filter to protect the cartridge.

SPECIFICATIONS

Selected raw materials, suitable for drinking water.

Endcaps: Polypropylene.


Container: PET.

Flat seal: SEBS with antimicrobial technology

Grid: Polypropylene.

Net: polyester.

Treatment material: ScaleArmor™ certified media

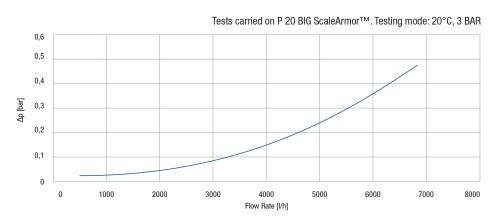



P 20 BIG ScaleArmor™

CONTAINER WITH ScaleArmor™ MEDIA WITH DOUBLE OPEN END (DOE)

PART Number	MODEL	NOMINAL HEIGHT	MAX FLOW RATE I/h	DIMENSIONS mm A B C		
	OD 4,50" x ID 1,10"					
RA5197635	P 20 BIG ScaleArmor™	20"	2270	508	120	28



REFILL AVAILABLE (1 REFILL = 1 FILLED CARTRIDGE):

PART NUMBER: RA5199698
Use only the original ScaleArmor™ refill to maintain the certified effectiveness.

MODELS:



www.atlasfiltri.com | MADE IN ITALY

CERTIFICATIONS:





- P 20 BIG ScaleArmor™ series 20", OD 4.50", ID 1.10". SX configuration.

